



■ Features:

- 100-240V AC input
- Single Output
- 85% high efficiency
- 100% full load bur-in test
- Built-in EMI filter with tiny ripple
- Protection: OTP, OLP, OVP, SCP
- Cooling by free air ventilation
- Intend for LED lightings
- CE ROHS Certified
- 2 year warranty


Specifications

	Product Code	PS60-W1V24
Output	DC Voltage	24V
	Voltage tolerance	±2%
	Rated Current	2.5A
	Rated Power	60W
	Max Power	65W
	Ripple & Noise	≤120mVp-p
Input	Set-up, Rise, Hold-up Time	100ms, 30ms, 20ms/ 230VAC
	Input voltage range	AC 100~240V; 47Hz~63Hz;
	AC Current	1A/230VAC
	Efficiency	85%
Protection	Quiescent current	<10mA/230VAC
	Over Load	Above 105% of rated power
		Shut-down output voltage, auto recovery after fault condition is removed
	Over Voltage	Above Max. Voltage
		Shut-down output voltage, auto recovery after fault condition is removed
	Over Temperature	Over 130°C detected on main IC control
		Shut-down output voltage, auto recovery after fault condition is removed
Ambient	Working Temp. & humidity	"-20°C~+70°C, 20%~90%RH
	Storage temp. & humidity	"-40°C~+85°C, 10%~95%RH
Withstand voltage		I/P-O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min;
Tesings	Safety	GB4943 ;IEC60950-1; EN60950-1
	EMC	EN55015:2013; GB9254
	LVD	EN61347-2-13:2006/AC:2010
Other	Casing Material	Metal Alloy
	Cooling Method	Free air ventilation
	Demension(L*W*H)	112.3*78*36.5mm
	Weight	0.3kg/pcs, 120pcs/36kg/CTN/0.07CBM
Note	1, The above mentioned data were measured at 230VAC input and 25°C. 2, Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3, Dis-connect the AC input before checking any mal-phenomenons. 4, Make sure the INPUT&OUPUT were in right situation before connected to power supply. 5, Be ware of high power pressure may caused by short circuit when installing metal casing products.	


■ Block Diagram

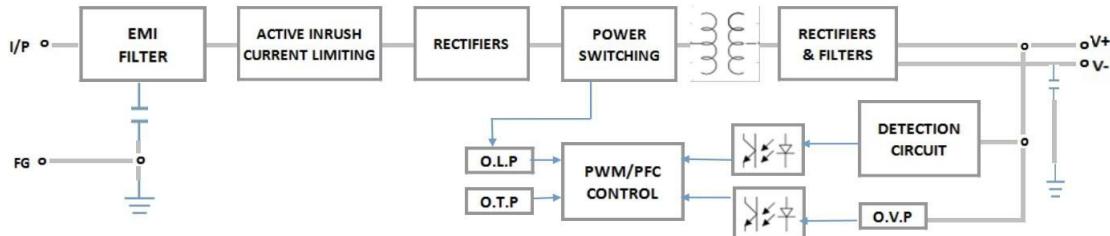

■ Mechanical Specification

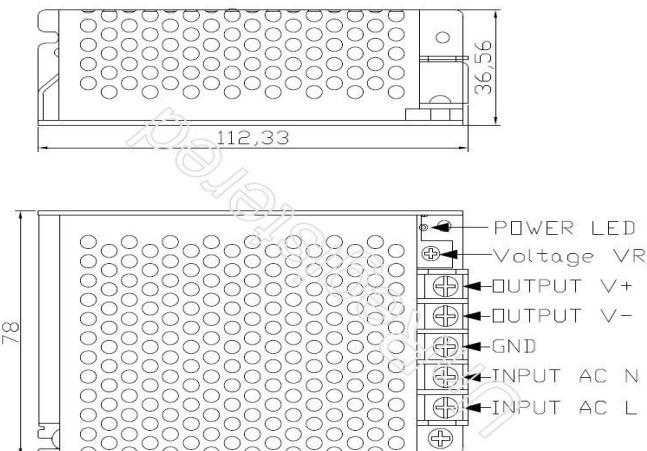

■ Temperature Derating Curve

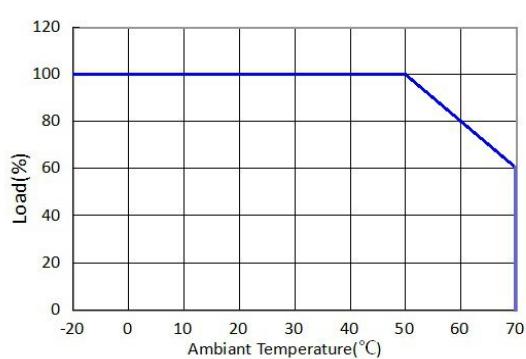

■ Output Load VS Input Voltage

