



MASTER VALUE LEDspot MV

MASTER LED spot VLE D 6.2-80W GU10 927 36D

Delivering a warm, halogen-like accent beam, the MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it achieves more natural colours, creating cosy and comfortable ambience for residential and hospitality projects, and emphasising the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. The MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- · Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

| General Information | |
|----------------------------|--------------|
| Cap base | GU10 [GU10] |
| EU RoHS compliant | Yes |
| Nominal lifetime (nom.) | 25000 h |
| Switching cycle | 50,000X |
| Technical type | 6.2-80W |
| | Narrow Cone |
| | |
| Light Technical | |
| Colour Code | 927 |
| Technical Beam Angle (Nom) | 36 ° |
| | |

| Lamp Luminous Flux 25°C EL (Nom) | 575 lm | |
|---|-----------------|--|
| Luminous intensity (nom.) | 850 cd | |
| Colour Designation | Warm white (WW) | |
| Colour Temperature, horizontal (Nom) | 2700 K | |
| Lamp Luminous Efficacy EM (Nom) | 92.00 lm/W | |
| Colour consistency | <6 | |
| Colour Rendering Index,horiz (Nom) | 90 | |
| LLMF at end of nominal lifetime (nom.) 70 % | | |
| Luminous flux in 90° cone (rated) | 575 lm | |
| | | |


Datasheet, 2022, June 14 data subject to change

MASTER VALUE LEDspot MV

| Operating and Electrical | |
|----------------------------------|----------------------------|
| Input frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 6.2 W |
| Lamp current (nom.) | 33 mA |
| Wattage equivalent | 80 W |
| Starting time (nom.) | 0.5 s |
| Warm-up time to 60% light (nom.) | 0.5 s |
| Power factor (nom.) | 0.88 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case maximum (nom.) | 80 °C |
| | |
| Controls and Dimming | |
| Dimmable | Only with specific dimmers |
| | |
| Mechanical and Housing | |
| Bulb shape | PAR16 [PAR 2 inch] |
| | |

| Approval and Application | |
|------------------------------------|--|
| Energy Efficiency Class | F |
| Suitable for accent lighting | Yes |
| Energy consumption kWh/1,000 hours | 7 kWh |
| | 391905 |
| | |
| Product Data | |
| Full product code | 871869967541700 |
| Order product name | MASTER LED spot VLE D 6.2-80W GU10 927 |
| | 36D |
| EAN/UPC – product | 8718699675417 |
| Order code | 929002059502 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 10 |
| SAP material | 929002059502 |
| SAP net weight (piece) | 0.038 kg |
| | |


Dimensional drawing




MASTER LED spot VLE D 6.2-80W GU10 927 36D



Photometric data




Light Distribution Diagram

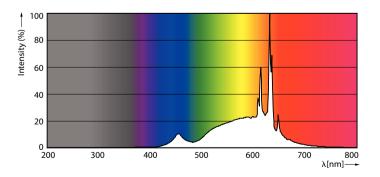

Spectral Power Distribution Colour

MASTER VALUE LEDspot MV


Photometric data




Calculus Photometrics 4.5 Philips Lighting GLV. Fago: 1

Accent Lighting Spots

Lifetime

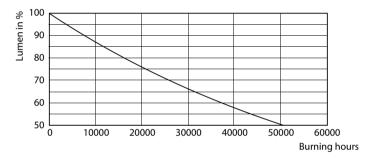

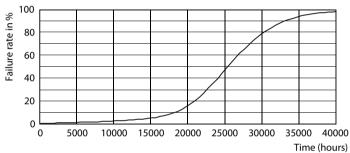

25K LMP 25K LED



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.